



GL A1

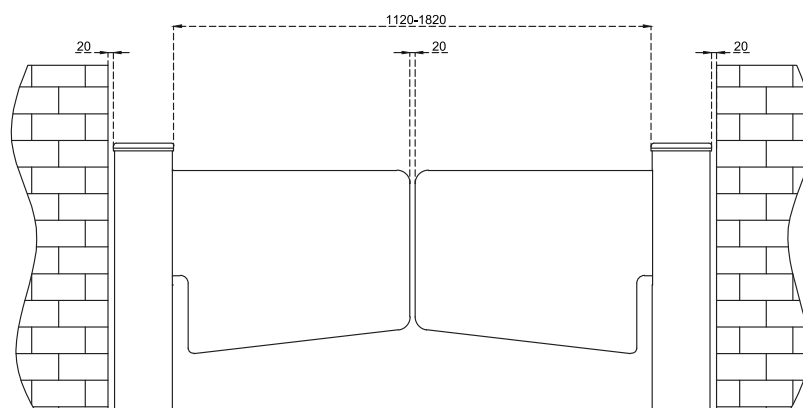

- Power Requirements** : 110/220 V. 60/50 Hz. AC (%±10) 24 V. DC at standby ~2W. max. ~65W.
- Wing Features** : Impact resistant 10 mm thick tempered glass (Opt. polycarbon or acrylic). Available in 550 mm or 900 mm standard lengths.
- Body Features** : Single piece 304-grade (Opt. 316-grade) satin finished and circular stainless steel body. Standard 20 mm thick natural granite (Star Galaxy Black) stone top lid for a decorative and aesthetical appearance.
- Operation Temperature, Humidity, IP Rating, MCBF** : -20°C to + 68°C (Opt. -50°C with heater unit), RH 95% non-condensing / IP 44 indoor model (for pipe wing versions IP 56 option is available.) / 1M cycles.
- Control System** : All inputs are opto-coupler protected. Compatible with all access control systems that provide dry contact or grounding outputs. Optional RS232/RS485/TCP IP control module is available.
- Operation** : Electronically controlled DC motor driven bi-directional system.
- Emergency Mode** : System allows free passage in emergency mode and in case of power failure.
- Flow Rate** : Wing opening /closing time ~1,5 / - 2,5 sec.
- Standard Features** : Circular RGB LED direction and status indicator.
- Optional Accessories and Applications** : Remote control unit, interface unit for PC, RS485, RS232 and LAN, counter, audio-messaging system, floor mounting plate, separator, card reader pole.
Exit gate functionality to be used on emergency escape routes as per EltVTR 1997-12 and DIN EN 60950-1:2011-01 (GL A1 FWZ)

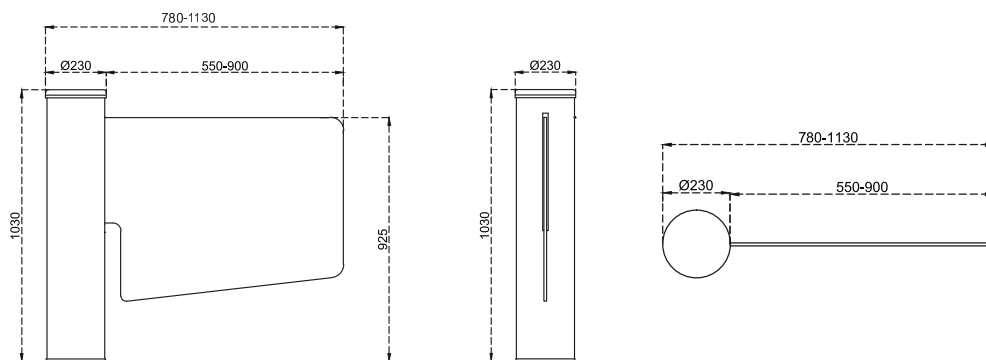

*Design and specifications are subject to change without notice. *All dimensions are in millimeters (mm).